

# Model ROYAL



Anti-static



DS (EN 13893)



Resistant strength



Bfl-s1

ECONYL



Luxurious



Highly suitable for property



## Clean-off system

---

# Model ROYAL

<b>Construction</b>	Tufting-Velours 1/8"
<b>Pile above substrate</b>	100% polyamide ECONYL
<b>Substrate material</b>	Polyester fleece
<b>Backing material</b>	Heavy coating
<b>Pile weight / fibre weight</b>	1.400
<b>Total weight (g/m<sup>2</sup>)</b>	4.200
<b>Overall height (mm)</b>	11
<b>Tuft density/m<sup>2</sup></b>	148.000
<b>Slip resistance</b>	DS (EN 13893)
<b>Certificates</b>	CE conformity EN 14041 (rolls only)
<b>Supplied as rolls</b>	200 cm wide (incl. border)

<b>Product characteristics</b>	Soiling and moisture absorption
<b>Laying</b>	Individual rolls or smaller coverings can be laid loose on any smooth floor. For larger areas, and allowing for on-site conditions, we recommend fixed laying with an adhesive suitable for plasticised PVC.
<b>Cleaning</b>	Dirt removal with powerful brush vacuum cleaner. The spray extraction process is recommended for periodic basic cleaning. Cleaning with plenty of water is absolutely no problem, water temperature should not be above 40°C. Do not use chlorinated hydrocarbon (Tetra).
<b>Brand</b>	emco

## Clean-off system


---

# Model ROYAL

### Colours



72.01 black

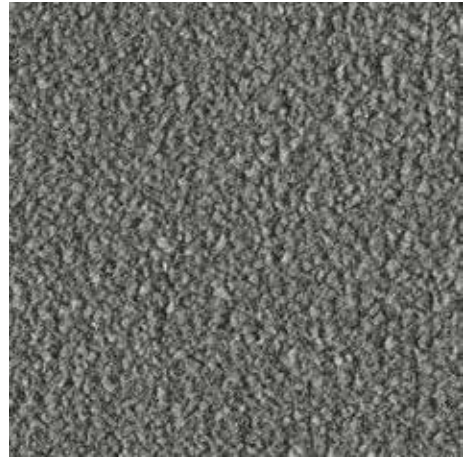

72.02 grey



72.03 mocha



72.04 red



72.05 green

Subject to technical modifications

emco Bautechnik GmbH · Breslauer Straße 34 - 38 · D-49808 Lingen (Ems)  
· Germany · Phone: +49 (0) 591/9140-500 · Fax: +49 (0) 591/9140-852 · Email:  
bau@emco.de · www.emco-bau.com

**EMCO**